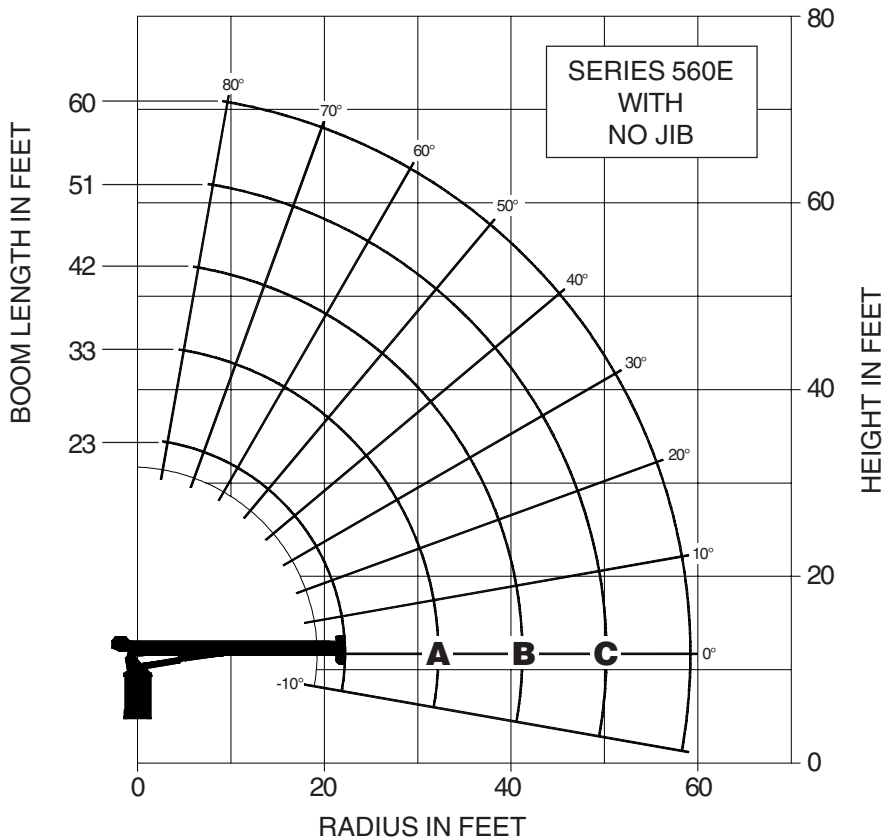


NATIONAL CRANE CORPORATION






878203



LOADLINE EQUIPMENT DEDUCT (lb)		
Downhaul weight	_____	150
One sheave block	_____	200
Two sheave block	_____	355

LOAD RATINGS

LOAD RADIUS (FT)	LOADED BOOM ANGLE (DEG)	23 FT BOOM (LB)	LOADED BOOM ANGLE (DEG)	A 33 FT BOOM (LB)	LOADED BOOM ANGLE (DEG)	B 42 FT BOOM (LB)	LOADED BOOM ANGLE (DEG)	C 51 FT BOOM (LB)	LOADED BOOM ANGLE (DEG)	60 FT BOOM (LB)
5	75	36,000								
8	67	22,050	74.5	20,950						
10	61.5	18,600	71	17,600	75.5	17,000				
12	55.5	16,050	67	15,200	72.5	14,650	76.5	14,250		
14	49.1	14,000	63	13,400	70	12,850	74	12,500	77	11,200
16	42	12,300	59	11,950	67	11,500	72	11,100	75	10,450
20	23	8,900	50	9,750	60.5	9,400	67	9,100	71	8,850
25			38	7,650	52.5	7,600	61	7,400	66	7,200
30			17	5,250	43	6,250	54	6,150	60.5	6,000
35					31	5,000	46.5	5,200	55	5,100
40					7	2,900	37.5	4,350	48.5	4,400
45							25.5	3,540	41.5	3,750
50									32.5	3,100
55									21	2,400
	0	4,300	0	2,650	0	1,750	0	1,150	0	1,050

1 PART LINE	2 PART LINE	3 PART LINE	4 PART LINE	5 PART LINE	NOTICE
					
MAX. PULL 7,700 lb	MAX. PULL 15,400 lb	MAX. PULL 23,100 lb	MAX. PULL 30,800 lb	MAX. PULL 32,000 lb	- Do not deadhead line block against boom tip when extending boom. - Keep at least 3 wraps of loadline on drum at all times. - Use only 9/16" diameter rotation resistant cable with 38,500 lb breaking strength on this machine. - Maximum capacity with "burst of speed" is 3,000 lb.